



MINI AIR GROUT II

PNEUMATIC GROUTING UNIT

ITALSWISS Engineering S.r.l.

Strada Romana di Sotto, 27 - 28877 ORNAVASSO (VB) - ITALIA

Tel. ++39 - 0323 - 837 116 Fax. ++39 - 0323 - 835 369 E-mail: arrigo.scarin@italswiss.net Web page: www.italswiss.com

TECHNICAL SPECIFICATION

Mixer

Single bin Pneumatic mixer (on wheels)

Pneumatic motor : 1,25 Kw

Sound level : 87 dBa max

Tank capacity : 300 l

Rotation speed : 60-300 rpm

Mixing time : approx. 2 min

Weight : 200 kg

Air consumption : 300 l/min at 8 bar

Pump

Mini Air Grout II

Air-driven piston diam 200

Double effect pump

Stroke: 150 mm

Flow rate : 75 l/min max at 8 bar air pressure


Injection pressure : max 50 bar with air pressure 8 bar

Air consumption : 7000 l/min at 8 bar

Weight: 100 Kg

OVERALL DIMENSIONS: 120 x 80 x H 160 cm – TOTAL WEIGHT: 300Kg

Mini Air Grout II

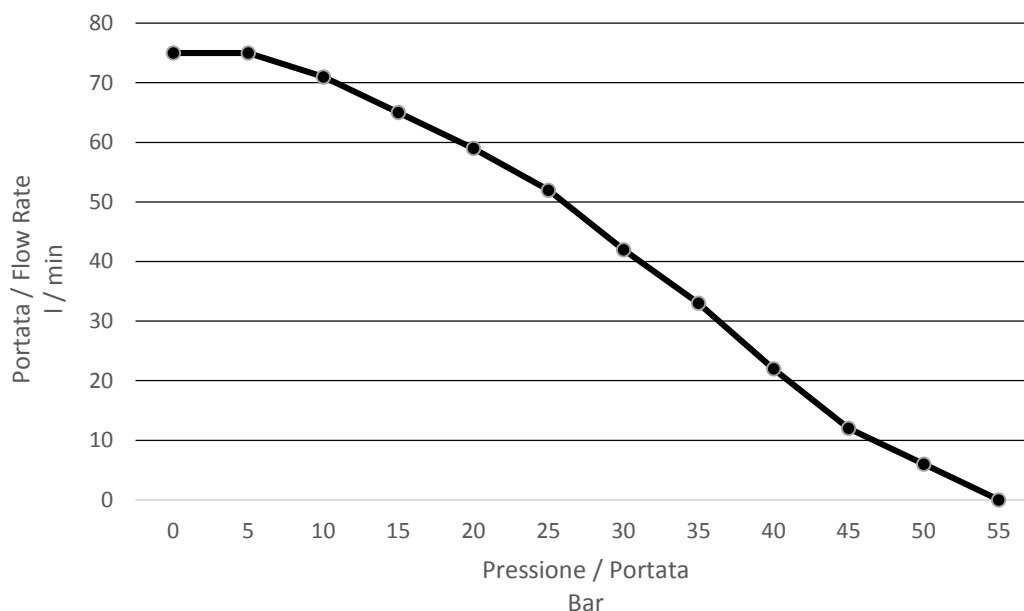

ACCESSORIES



GROUT HOSE



SHOTCRETE NOZZLE



OUTLET MANOMETER

ITALSWISS Engineering S.r.l.

Strada Romana di Sotto, 27 - 28877 ORNAVASSO (VB) - ITALIA