



# tecnivell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



**GP9H / GP22H**

**GP22HFV / GP30HFV**

HORIZONTAL GROUT PUMP

## Overall dimensions and weight

	GP9H		GP22H / GP22HFV / GP30H	
Width	916 mm	3'	916 mm	3'
Length	1530 mm	5'	1770 mm	5'9"
Height	1150 mm	3'9"	1420 mm	4'8"
Weight	680 Kg	1500 lb	1100 kg	2425 lb



## TECHNICAL FEATURES

### Double effect piston / piston à double effet / Doppeleffekt Kolben

	GP9H	GP22H	GP22HFV	GP30HFV
<b>Max flow rate / débit maximale / maximale Durchflussrate</b>	150 lt/min 40 gpm		215 lt/min 57 gpm	
<b>Max pressure rate / pression maximale / maximal Druckrate</b>	90 bar 9 Mpa 1305 PSI	100 bar 9 Mpa 1450 PSI	90 bar 9 Mpa 1305 PSI	
<b>Piston diameter / diamètre du piston / Kolbendurchmesser</b>	5" 127 mm			
<b>Stroke / course / Hubweg</b>	8" 203 mm			
<b>Max stroke rate / coup par minute / max Hub pro Minute</b>	32 / min - 32 spm		43 /min 43 spm	
<b>Electric motor / moteur électrique / Elektromotor</b>	9 kW	22 kW		30 kW
<b>Suction diameter / diamètre d'aspiration / Saugdurchmesser</b>	3" 76,2 mm			
<b>Output diameter / diamètre de sortie / Ausgangsdurchmesser</b>	1"1/4 31,75 mm			

DIAGRAMMA PORTATA - PRESSIONE  
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE  
(gpm)

# GP9H


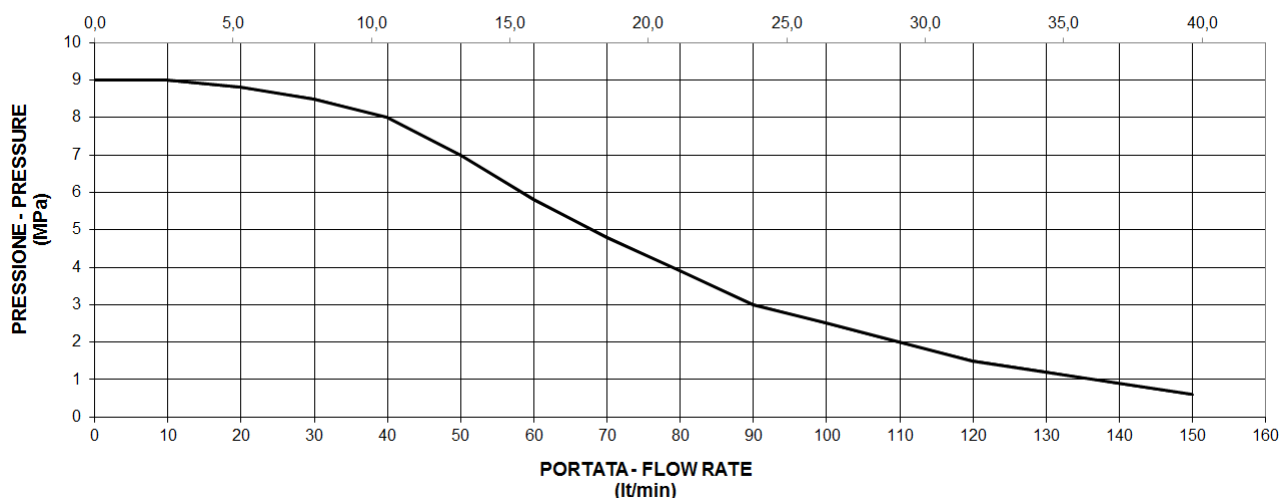


DIAGRAMMA PORTATA - PRESSIONE  
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE  
(gpm)

# GP22H

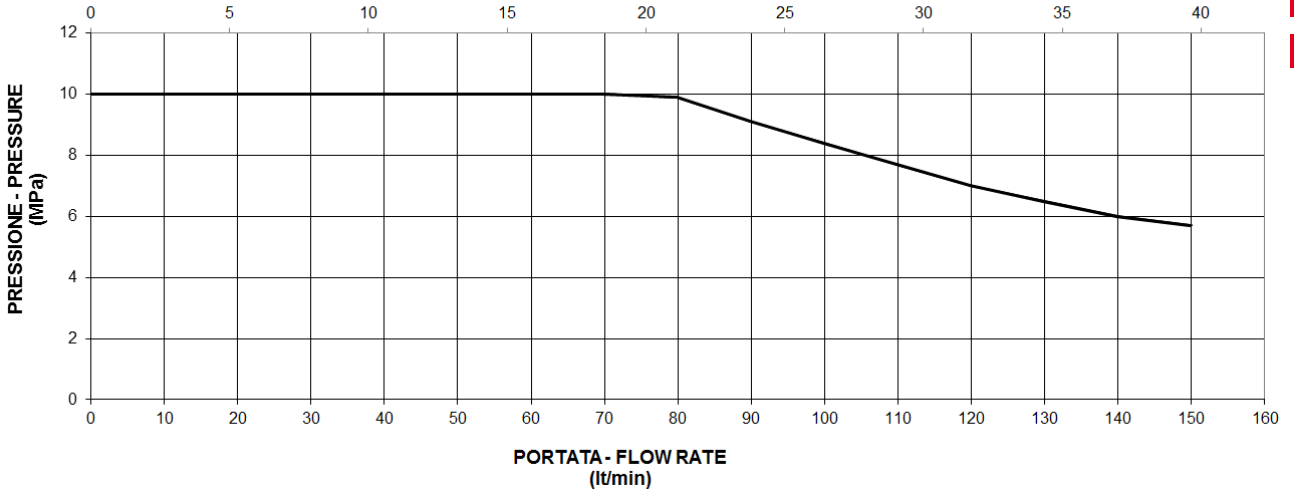

LCD Control panel (optional)  
with recording system and preset volume / pressure  
injection control


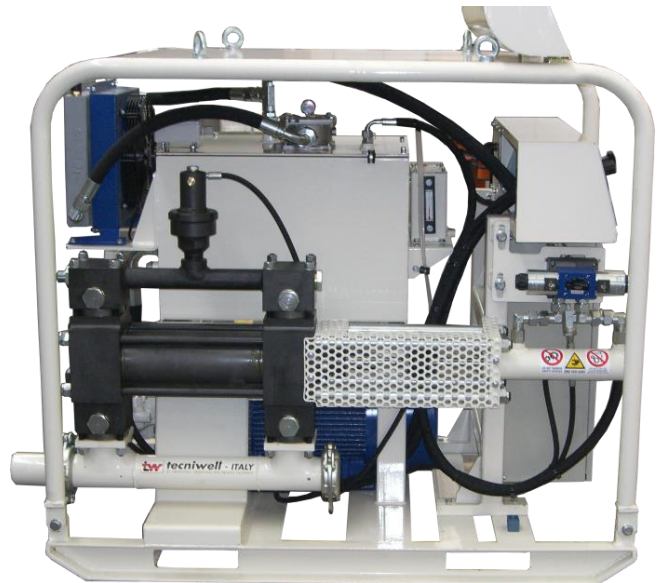


DIAGRAMMA PORTATA - PRESSIONE  
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE  
(gpm)

# GP22HFV GP30HFV



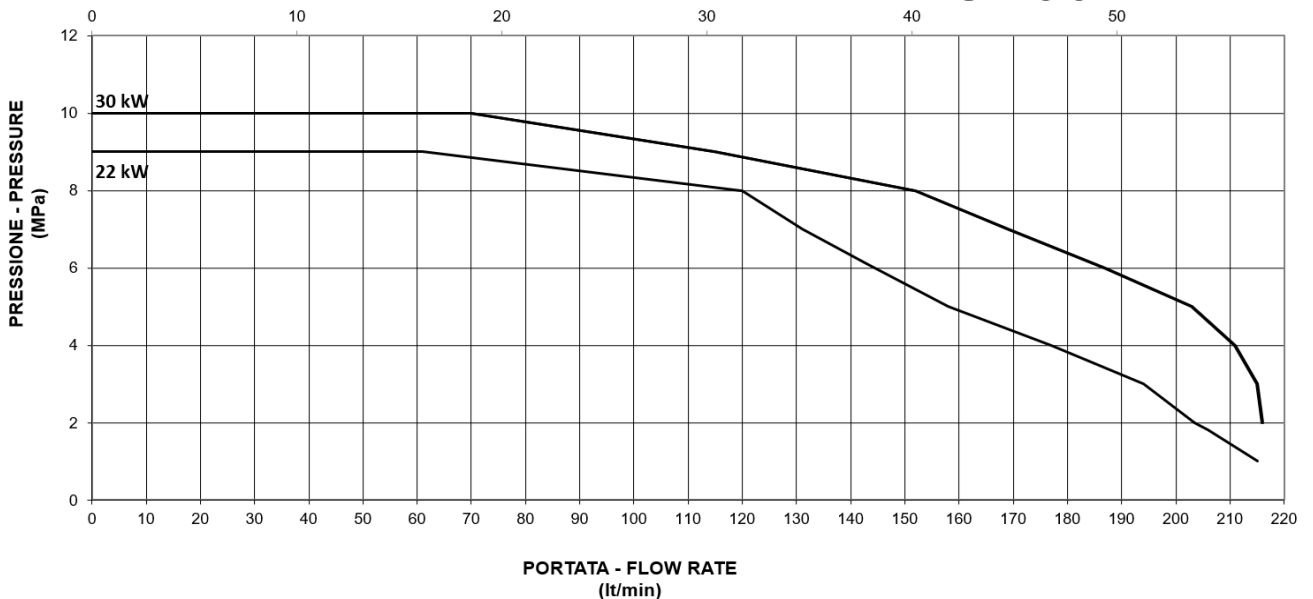

# Productivity and Reliability with full **Safety** compliance.



JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086  
e-mail: [info@tecniwell.com](mailto:info@tecniwell.com) – [www.tecniwell.it](http://www.tecniwell.it)

All technical data are purely indicative and subject to change without notice