



tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



TW 2500

HIGH FLOW TRIPLEX PUMP



Technical Features

Max power input / puissance max / maximale Kraft	405 kW	550 HP	
Max pressure / pression maximale / maximaler Druck	13 MPa	130 bar	1885 psi
Max flow rate / débit maximale / maximale Durchflussrate	3100 lt/min	819 gpm	
Piston diameter / diamètre du piston / Kolbendurchmesser	From 5”1/2 (139,7mm) to 8” (203,2 mm)		
Stroke / Course / Hubweg	5,5” – 139,7 mm		
Maximum stroke rate / coup par minute / max Hub pro Minute	240 / min	240 spm	
Suction diameter / diamètre d'aspiration / Saugdurchmesser	6”	152,4 mm	
Output diameter / diamètre de sortie / Ausgangsdurchmesser	4”	101,6 mm	


7" Control panel lcd monitor

Bareshaft dimensions and weight

Width 1500 mm - 4'11"	Height 890 mm - 2'11"	Lenght 1950 mm - 6'5"	Weight 3600 Kg - 7936 lb
-----------------------	-----------------------	-----------------------	--------------------------

Container dimensions and weight

Width 2435 mm - 7'12"	Lenght 6055 mm - 19'10"	Height 2650 mm - 8'8"	Weight 14000 Kg - 30864 lb
-----------------------	-------------------------	-----------------------	----------------------------

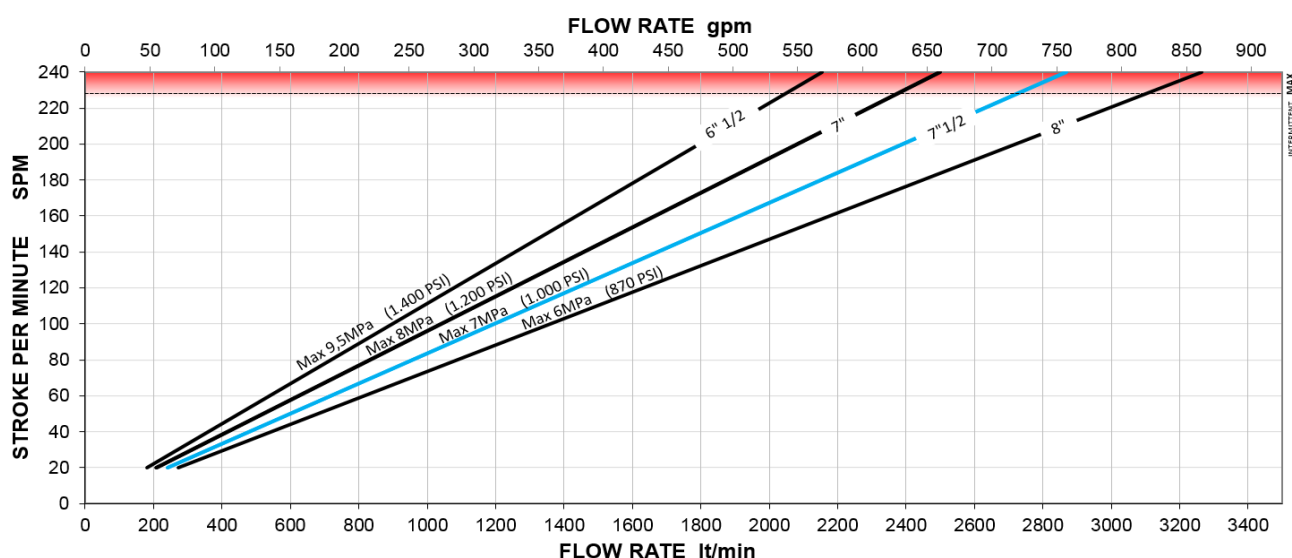

tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice