



tecniiwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



TW 600

HIGH PRESSURE TRIPLEX PUMP



Technical Features


Power input / puissance / Kraft	stg. IIIA	450 kW	610 HP
	Tier 4f	475 kW	650 HP
	Stg. V	405 kW	550 HP
Max pressure / pression maximale / maximaler Druck	90 MPa	900 bar	13000 psi
Max flow rate / débit maximale / maximale Durchflussrate	800 lt/min	214 gpm	
Piston diameter / diamètre du piston / Kolbendurchmesser	From 3" (76,2mm) to 5" (127mm)		
Stroke / Course / Hubweg	7" – 177,8		
Stroke volume / Course volume / Hubweg Volumen	4" = 4,32 lt - 4"1/4 = 4,88 lt - 4"1/2 = 5,47 lt - 5" = 6,76		
Maximum stroke rate / coup par minute / max Hub pro Minute	130 / min	130 spm	
Suction diameter / diamètre d'aspiration / Saugdurchmesser	5"	127 mm	
Output diameter / diamètre de sortie / Ausgangsdurchmesser	2"	50,4 mm	

Bareshaft dimensions and weight

Width 1600 mm - 5'3"	Height 1310 mm - 4'3,5"	Lenght 2270 mm - 7'5"	Weight 6600 Kg - 14550 lb
----------------------	-------------------------	-----------------------	---------------------------

Container dimensions and weight

Width 2438 mm - 7'12"	Lenght 6450 mm - 21'2"	Height 2591 mm - 8'6"	Weight 14500 Kg - 31967 lb
-----------------------	------------------------	-----------------------	----------------------------

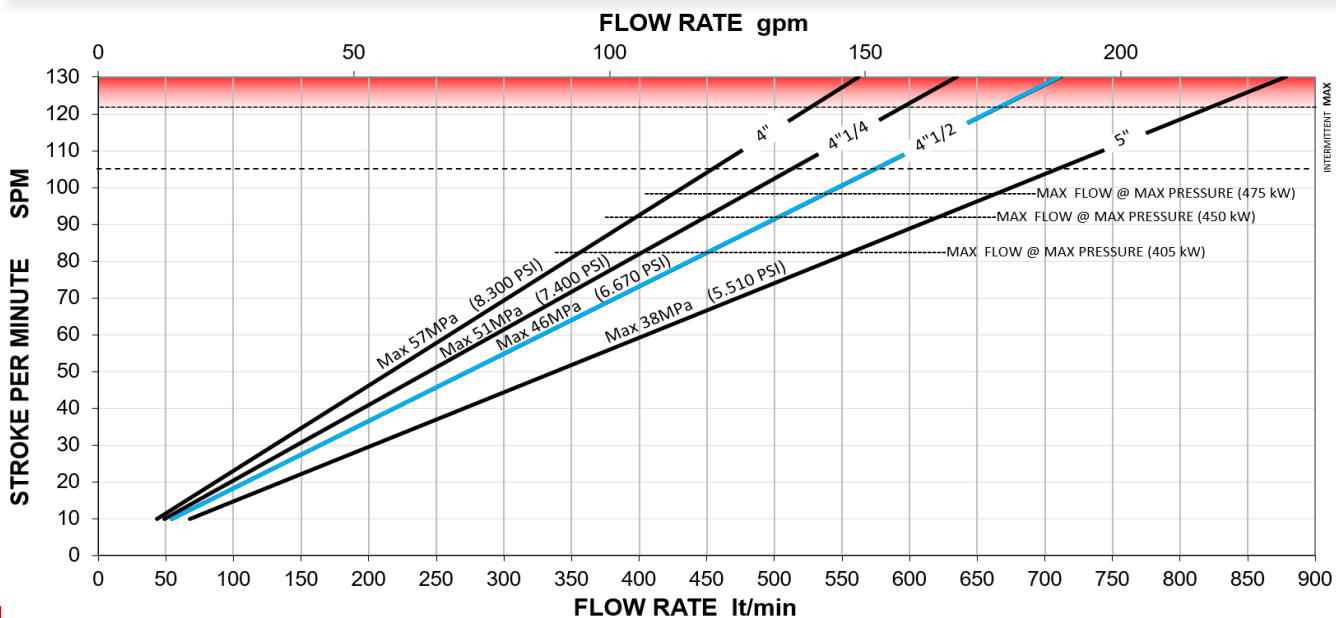

tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice